I - Sheet Number INS-HS136 Rev.-



Hood Shield

For proper installation and best possible fit, please read all instructions BEFORE you begin. For technical assistance or to obtain missing parts, please call Customer Relations at 1-800-344-8759.

Important Safety Information



- CAUTION Before driving, ensure that the hood shield is properly secured to vehicle.
- Do not use automatic "brush-style" car washes.
- Do not use cleaning solvents of any kind.
- Periodically check all components for tightness.

Contents

NOTE: Actual product may vary from illustration.









Hood shield

Self Tapping screw x6

Aluminium Flat Washer x6

Bump On x4

Tools Required



Car Wash Supplies



Clean Towel




Phillips screwdriver


Preparation Before Painting / Installation

- A trial fit is recommended to ensure proper positioning and fit.
- Check fit of parts before painting as we will not accept the return of modified or painted parts.
- Wash and dry your vehicle to remove any debris and/or dirt from the installation area.


Installation Steps NOTE: Actual application may vary slightly from illustrations.



Carefully separate the hood seal / gasket from the areas of the hood that align with the hood shield tabs, and remove (6) plastic seal retaining fasteners that align with the pre-drilled holes and tabs in the hood shield.



NOTE: Exercise extreme caution not to tear or damage the hood seal / gasket when seperating from hood.

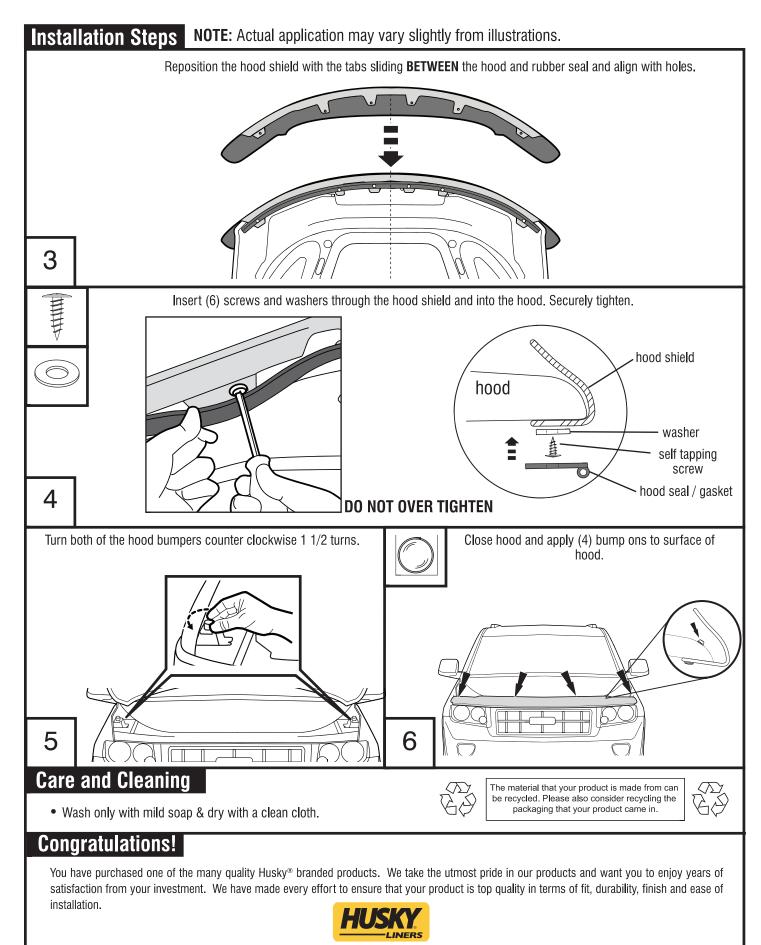

1-800-344-8759 • Visit us at huskyliners.com © 2024 Husky Liners, Inc. All rights reserved. Husky® and the Husky® logo are trademarks of Husky Liners, Inc.